


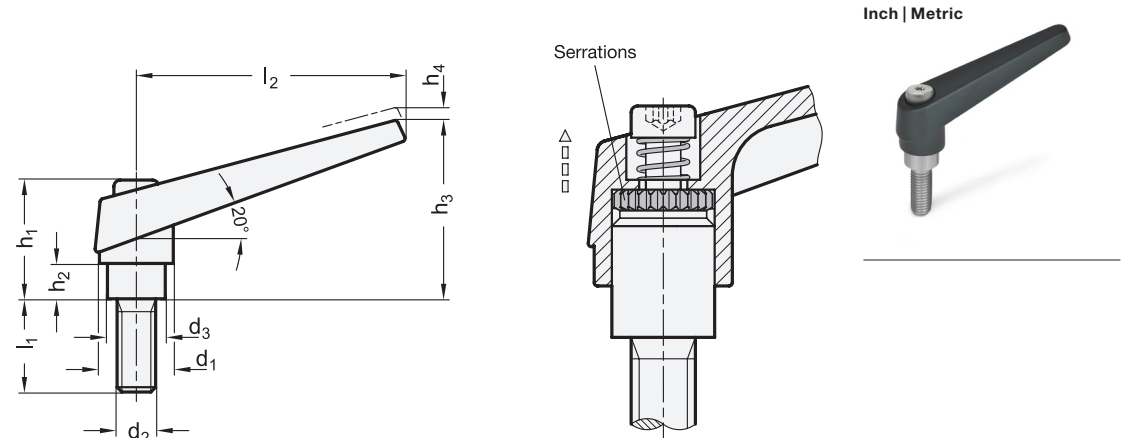

Specification

Lever body

Zinc die-cast

Powder coated

• Black, RAL 9005, textured finish

• Orange, RAL 2004, textured finish

● SW

● OS

Threaded stud / Retaining screw

Stainless steel AISI 303

RoHS

On request

• Special colors, stud lengths, and threads

Adjustable levers GN 101.1 have proven to be ideal wherever parts have to be clamped in a confined space or in a particular lever position. The insert is connected to the lever via serrations that can easily be disengaged. Pulling the lever upwards disengages the serrations, allowing it to be swivelled to the ideal clamping position. When releasing the lever, the serrations automatically re-engage.

see also...	Page
GN 101 Adjustable Levers (Steel Threaded Stud)	QVX
GN 300.1 Adjustable Levers (Stainless Steel Threaded Stud)	QVX
GN 300.2 Adjustable Levers (Steel Threaded Stud, Zinc Plated)	QVX
GN 302.1 Straight Adjustable Levers (Stainless Steel Threaded Stud)	QVX
GN 300.5 Adjustable Levers (Adjustable Lever)	QVX
GN 300.5 300.6 Adjustable Levers	QVX
EN 604.1 Adjustable Levers (Plastic Lever Body)	QVX

Technical Information	
Stainless Steel Characteristics	QVX

Inch table

1

2

3

Dimensions in: inches / millimeters

d ₁	d ₂	l ₁								d ₃	h ₁	h ₂	h ₃	h ₄ Stroke	l ₂
0.55 14	10 x 32	0.47 12	0.63 16	0.79 20	0.98 25	1.26 32	-	-	-	0.39 10	0.98 25	0.18 4.5	1.38 35	0.14 3.5	1.77 45
0.55 14	1/4 x 20	0.47 12	0.63 16	0.79 20	0.98 25	1.26 32	1.57 40	1.77 45	-	0.39 10	0.98 25	0.18 4.5	1.38 35	0.14 3.5	1.77 45
0.71 18	5/16 x 18	0.63 16	0.79 20	0.98 25	1.26 32	1.57 40	1.77 45	1.97 50	2.48 63	0.53 13.5	1.22 31	0.26 6.5	1.77 45	0.16 4	2.44 62
0.71 18	3/8 x 16	0.79 20	0.98 25	1.26 32	1.57 40	-	-	-	-	0.53 13.5	1.22 31	0.26 6.5	1.77 45	0.16 4	2.44 62
0.87 22	3/8 x 16	0.79 20	0.98 25	1.26 32	1.57 40	1.77 45	1.97 50	2.48 63	-	0.63 16	1.42 36	0.31 8	2.05 52	0.16 4	2.91 74
0.87 22	1/2 x 13	0.79 20	0.98 25	1.26 32	-	-	-	-	-	0.63 16	1.42 36	0.31 8	2.05 52	0.16 4	2.91 74
0.98 25	1/2 x 13	0.98 25	1.26 32	1.57 40	1.77 45	1.97 50	2.48 63	-	-	0.75 19	1.69 43	0.43 11	2.48 63	0.16 4	3.50 89

Metric table

1

2

3

Dimensions in: millimeters / inches

d ₁	d ₂		l ₁								d ₃	h ₁	h ₂	h ₃	h ₄ Stroke	l ₂
14 0.55	M 5	M 6	12 0.47	16 0.63	20 0.79	25 0.98	32 1.26	40 1.57	50 1.97	10 0.39	25 0.98	4.5 0.18	35 1.38	3.5 0.14	45 1.77	
18 0.71	M 6	M 8	16 0.63	20 0.79	25 0.98	32 1.26	40 1.57	50 1.97	63 2.48	13.5 0.53	31 1.22	6.5 0.26	45 1.77	4 0.16	62 2.44	
22 0.87	M 10	-	20 0.79	25 0.98	32 1.26	40 1.57	50 1.97	63 2.48	80 3.15	16 0.63	36 1.42	8 0.31	52 2.05	4 0.16	74 2.91	
25 0.98	M 12	-	25 0.98	32 1.26	40 1.57	50 1.97	63 2.48	80 3.15	-	19 0.75	43 1.69	11 0.43	63 2.48	4 0.16	89 3.50	
30 1.18	M 16	-	32 1.26	40 1.57	50 1.97	63 2.48	80 3.15	-	-	23 0.91	50.5 1.99	12 0.47	76 2.99	5 0.20	108 4.25	