


Metric

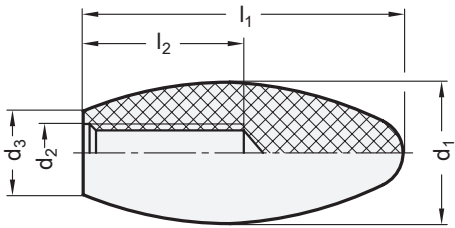

Metric table

Dimensions in: millimeters / inches				
¹ d ₁	² d ₂	d ₃	l ₁	l ₂ min.
14 0.55	M 5	7 0.28	34 1.34	25 0.98
23 0.91	M 6	14 0.55	60 2.36	17 0.67
23 0.91	M 8	14 0.55	60 2.36	22 0.87
26 1.02	M 8	16 0.63	70 2.76	25 0.98
26 1.02	M 10	16 0.63	70 2.76	25 0.98
30 1.18	M 10	16 0.63	65 2.56	26 1.02
30 1.18	M 12	16 0.63	65 2.56	26 1.02
35 1.38	M 12	22 0.87	85 3.35	25 0.98
35 1.38	M 16	22 0.87	85 3.35	25 0.98

Specification

- Plastic, Phenolic (PF)
- Operating temperature up to 230 °F (110 °C)
 - Black, shiny finish

RoHS

When using elliptical shaped knobs GN 201, it must be ensured that the threaded stud is not too short. Otherwise, there is a risk that the duroplast plastic body could break under certain loads. These knobs are often used on gear lever handles GN 310 instead of ball knobs DIN 319.

Technical Information	Page
Plastic Characteristics	QVX

How to order ¹ GN 201-30-M10 ²	1 Handle diameter d ₁
	2 Thread d ₂