




Metric

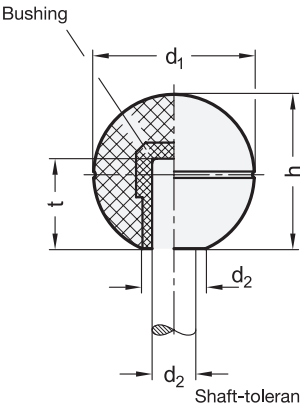

elesa
Original design S.N

- 3 Type
- B With Polyamide bushing

Metric table

Dimensions in: millimeters / inches				
d ₁	d ₂	t	d ₃ ≈	h ≈
20 0.79	B 6	13 0.51	7 0.28	19 0.75
25 0.98	B 6	14 0.55	10 0.39	24 0.94
25 0.98	B 8	14 0.55	10 0.39	24 0.94
30 1.18	B 8	14 0.55	15 0.59	28 1.10
30 1.18	B 10	18 0.71	15 0.59	28 1.10
35 1.38	B 8	14 0.55	15 0.59	33 1.30
35 1.38	B 10	18 0.71	15 0.59	33 1.30
40 1.57	B 10	18 0.71	15 0.59	38 1.50
40 1.57	B 12	21 0.83	15 0.59	38 1.50
45 1.77	B 12	21 0.83	21 0.83	42.5 1.67
45 1.77	B 14	24 0.94	21 0.83	42.5 1.67
50 1.97	B 12	21 0.83	21 0.83	47.5 1.87
50 1.97	B 14	24 0.94	21 0.83	47.5 1.87
50 1.97	B 16	28 1.10	21 0.83	47.5 1.87

Specification

Handle

- Plastic, Phenolic (PF)
- Operating temperature up to 230 °F (110 °C)
 - Black, shiny finish

Bushing

- Polyamid (PA)
- Pressed-in

RoHS

Technical Information

- ISO Fundamental Tolerances QVX
- Plastic Characteristics QVX

Ball knobs EN 319.1 do not require a thread on the shaft. During mounting, easy blows with a soft hammer are sufficient to drive the knob into place; the shaft end should be slightly rounded or chamfered (30°). The bore is conical which guarantees a firm press-on operation. The polyamide bushing provides a good holding force even with a shaft tolerance of h11. The knobs are resistant to vibrations and may be re-assembled any time.

see also... Page

EN 719.1 Domed Gear Lever Knobs (Press-On Type) QVX

How to order

1

2

3

EN 319.1-40-B10-B

1

2

3

Ball diameter d₁

Bore d₂

Type