


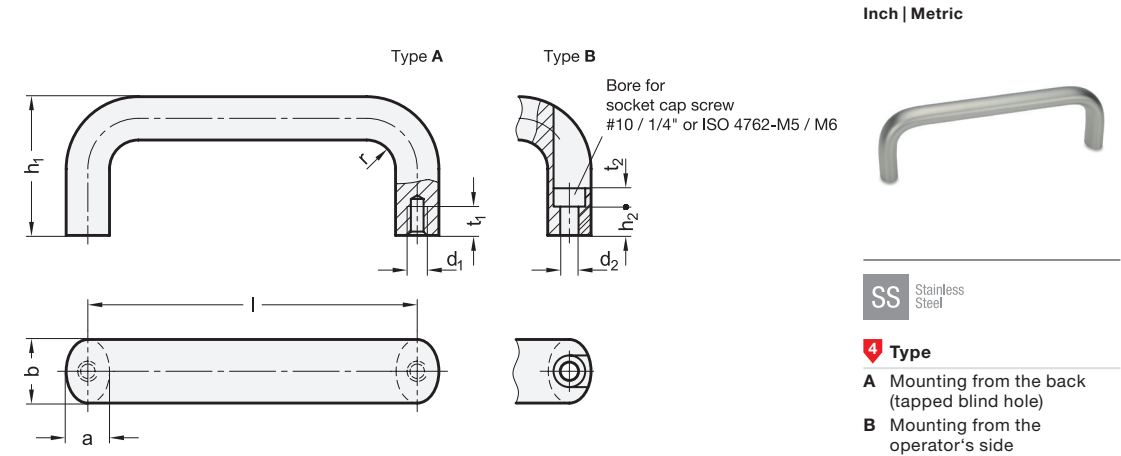

Specification	5
Stainless steel AISI 304	GS GP
• Matte shot-blasted finish	
• Slip polished, shiny metallic finish (only type A in metric sizes)	

RoHS

On request
• Polished version GP in inch sizes
• Various inch and metric size fasteners and kit packaging

Cabinet U-handles GN 565.5 are often used in the food industry or other such applications where a non-corrosive material is necessary. The shape of this sturdy handle has good ergonomic features. These cabinet U-handles are manufactured from a bent aluminum profile.

see also...	Page
GN 565 Cabinet U-Handles (Aluminum)	QVX
GN 565.1 Cabinet U-Handles (Aluminum)	QVX
GN 425 Cabinet U-Handles (Stainless Steel)	QVX
GN 426.5 Cabinet U-Handles (Stainless Steel)	QVX
GN 728.5 Economical Cabinet U-Handles (Stainless Steel, Mounting from the Back or from the Operator's Side)	QVX

Technical Information	
Load Capacity Information	QVX
Stainless Steel Characteristics	QVX

Accessory	
GN 181 Mounting Plate Sets (Mounting from the Operator's Side)	QVX

How to order (Inch)	1 Handle width b
	2 Thread d ₁
	3 Length l
	4 Type
	5 Finish
1 2 3 4 5 GN 565.5-20-1/4X20-112-A-GS	

How to order (Metric)	1 Handle width b
	2 Thread d ₁ (Bore d ₂)
	3 Length l
	4 Type
	5 Finish
1 2 3 4 5 GN 565.5-20- M6 -160-A- GP	

Inch table

1

2

3

Dimensions in: inches / millimeters

b	d ₁ Thread	Length l Type A Shot-blasted GS	a	h ₁	h ₂	r	t ₁ min.	t ₂
0.79 20	1/4 x 20	4.41 112	0.51 13	1.93 49	0.53 13.5	0.51 13	0.39 10	0.22 5.5
0.79 20	1/4 x 20	5.04 128	0.51 13	2.01 51	0.53 13.5	0.51 13	0.39 10	0.22 5.5
0.79 20	1/4 x 20	6.30 160	0.51 13	2.01 51	0.53 13.5	0.51 13	0.39 10	0.22 5.5

Metric table

1

2

2

3

Dimensions in: millimeters / inches

b	d ₁ Thread	d ₂ Bore	Length l			a	h ₁	h ₂	r	t ₁ min.	t ₂
			Type A Shot-blasted GS	Type A Slip polished GP	Type B Shot-blasted GS						
20 0.79	M 6	5.4 0.21	112 4.41	112 4.41	112 4.41	13 0.51	49 1.93	13.5 0.53	13 0.51	10 0.39	5.5 0.22
20 0.79	M 6	5.4 0.21	128 5.04	128 5.04	128 5.04	13 0.51	51 2.01	13.5 0.53	13 0.51	10 0.39	5.5 0.22
20 0.79	M 6	5.4 0.21	160 6.30	160 6.30	160 6.30	13 0.51	51 2.01	13.5 0.53	13 0.51	10 0.39	5.5 0.22
20 0.79	M 6	-	200 7.87	200 7.87	-	13 0.51	51 2.01	-	13 0.51	10 0.39	-
20 0.79	M 6	-	250 9.84	-	-	13 0.51	51 2.01	-	13 0.51	10 0.39	-
20 0.79	M 6	-	300 11.81	-	-	13 0.51	51 2.01	-	13 0.51	10 0.39	-
20 0.79	M 6	-	400 15.75	-	-	13 0.51	51 2.01	-	13 0.51	10 0.39	-
26 1.02	M 8	6.4 0.25	128 5.04	128 5.04	128 5.04	17 0.67	57 2.24	11 0.43	19 0.75	12 0.47	6 0.24
26 1.02	M 8	6.4 0.25	160 6.30	160 6.30	160 6.30	17 0.67	57 2.24	11 0.43	19 0.75	12 0.47	6 0.24
26 1.02	M 8	6.4 0.25	200 7.87	200 7.87	200 7.87	17 0.67	57 2.24	11 0.43	19 0.75	12 0.47	6 0.24
26 1.02	M 8	-	300 11.81	-	-	17 0.67	57 2.24	-	19 0.75	12 0.47	-
26 1.02	M 8	-	400 15.75	-	-	17 0.67	57 2.24	-	19 0.75	12 0.47	-
26 1.02	M 8	-	500 19.69	-	-	17 0.67	57 2.24	-	19 0.75	12 0.47	-