

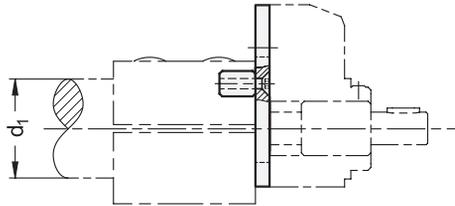


**Metric**

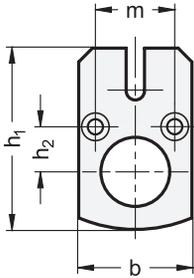

**Mounting example**

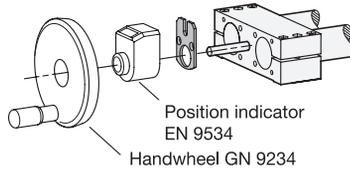

**Metric table**

Dimensions in: millimeters / inches

<b>d<sub>1</sub></b> Ø Linear actuator	<b>b</b>	<b>h<sub>1</sub></b>	<b>h<sub>2</sub></b>	<b>m</b>
18 0.71	27 1.06	38.5 1.52	10 0.39	20 0.79

**Specification**

<b>Body</b>	Aluminum	
	Anodized finish, black	<b>ELS</b>
<b>Fastening materials</b>	Steel, zinc plated	
	RoHS	

Torque supports GN 491.2 are required for mounting a position indicator or a clamping plate to configurable double tube linear actuators with a nominal diameter of 18 mm.

The torque supports are made of black anodized aluminum and are screwed onto the linear actuator using the enclosed fastening materials. Due to the open groove on one side, the torque support prevents the position indicator or clamping plate against rotation.

see also...	Page
<b>GN 491</b> Double Tube Linear Actuators	QVX
<b>GN 492</b> Double Tube Linear Actuators	QVX
<b>EN 9034</b> Digital Position Indicators (Electronic Counter)	QVX
<b>EN 9534</b> Digital Position Indicators (Mechanical Counter)	QVX
<b>GN 9234</b> Handwheels	QVX

**How to order**

**GN 491.2-18-ELS**

- 1 Diameter d<sub>1</sub>
- 2 Finish

3.1  
3.2  
3.3  
3.4  
3.5  
3.6  
3.7  
3.8  
3.9  
3.10