

Knurled Nuts / Knurled Screws

Plastic, Threaded Bushing Brass / Threaded Stud Steel, with Extended Bushing







Metric



elesa
Original design BTL.

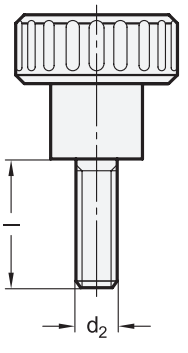



Metric table

Dimensions in: millimeters / inches

1 d_1	2 d_2	3 Length l	d_3	h	k	t min.
20 0.79	M 5	-	11 0.43	21 0.83	12 0.47	10 0.39
20 0.79	M 6	16 0.63	11 0.43	21 0.83	12 0.47	12 0.47
25 0.98	M 6	-	16 0.63	26 1.02	15 0.59	12 0.47
25 0.98	M 8	20 0.79	16 0.63	26 1.02	15 0.59	13 0.51
32 1.26	M 8	25 0.98	17 0.67	30 1.18	17 0.67	15 0.59

Specification

4

Knob
Plastic, polyamide (PA)
- Glass fiber reinforced
- Operating temperature
  -22 °F to +212 °F (-30 °C to +130 °C)
- Black, matte finish

Threaded bushing
Brass **MS**

Threaded stud
Steel **ST**
Zinc plated, blue passivated finish

RoHS

Technical Information
Plastic Characteristics QVX

Knurled nuts and knurled screws EN 590.1 are used for quick, tool-free mounting or adjusting of fixtures and devices.

see also...	Page
EN 530 Knurled Nuts (Phenolic Plastic)	QVX
EN 590.13 Knurled Nuts / Knurled Screws	QVX
EN 590.5 Knurled Nuts (Stainless Steel Tapped Insert)	QVX
EN 591 Knurled Screws (Threaded Stud Steel)	QVX
GN 420 Hollow Knurled Nuts (Steel Tapped Through Insert)	QVX
GN 421 Hollow Knurled Screws (Threaded Stud Steel / Stainless Steel)	QVX

How to order (Threaded Bushing)
1 2 4
EN 590.1-20-M5-MS

1	Diameter d_1
2	Thread d_2
4	Material

How to order (Threaded Stud)
1 2 3 4
EN 590.1-25-M8-20-ST

1	Diameter d_1
2	Thread d_2
3	Length l
4	Material

⚠ WARNING: Cancer and Reproductive Harm — www.P65Warnings.ca.gov