Star Knobs

Plastic, with Stainless Steel Threaded Stud

JW WINCO® A Ganter Company

GN 6336.11



GN 6336.12



Mounting example

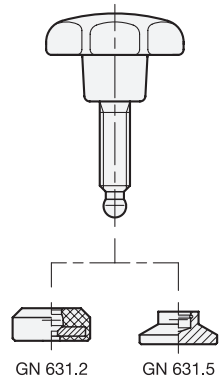

Metric

SS Stainless Steel

Metric table

Dimensions in: millimeters / inches

1 d_1	2 d_2	3 l_1				4 d_3	d_4	d_5 +0.05	h_1	h_2	l_2	l_3	l_4
32 1.26	M 6	25 0.98	35 1.38	45 1.77	-	15 0.59	14 0.55	4.5 0.177	20 0.79	10 0.39	5.1 0.20	3.6 0.14	7.6 0.30
40 1.57	M 8	30 1.18	40 1.57	50 1.97	60 2.36	18 0.71	18 0.71	6.1 0.240	25 0.98	13 0.51	6.2 0.24	4.2 0.17	9.2 0.36
40 1.57	M 8	30 1.18	40 1.57	50 1.97	60 2.36	21 0.83	18 0.71	6.1 0.240	25 0.98	13 0.51	6.2 0.24	5 0.20	10 0.39
40 1.57	M 8	30 1.18	40 1.57	50 1.97	60 2.36	25 0.98	18 0.71	6.1 0.240	25 0.98	13 0.51	6.2 0.24	5.5 0.22	10.5 0.41
40 1.57	M 8	30 1.18	40 1.57	50 1.97	60 2.36	32 1.26	18 0.71	6.1 0.240	25 0.98	13 0.51	6.2 0.24	6 0.24	11 0.43
40 1.57	M 8	30 1.18	40 1.57	50 1.97	60 2.36	40 1.57	18 0.71	6.1 0.240	25 0.98	13 0.51	6.2 0.24	8 0.31	13 0.51
50 1.97	M 10	35 1.38	45 1.77	55 2.17	65 2.56	21 0.83	22 0.87	7.8 0.307	32 1.26	17 0.67	7.3 0.29	4.3 0.17	10 0.39
50 1.97	M 10	35 1.38	45 1.77	55 2.17	65 2.56	25 0.98	22 0.87	7.8 0.307	32 1.26	17 0.67	7.3 0.29	4.6 0.18	10.5 0.41
50 1.97	M 10	35 1.38	45 1.77	55 2.17	65 2.56	32 1.26	22 0.87	7.8 0.307	32 1.26	17 0.67	7.3 0.29	5 0.20	11 0.43
50 1.97	M 10	35 1.38	45 1.77	55 2.17	65 2.56	40 1.57	22 0.87	7.8 0.307	32 1.26	17 0.67	7.3 0.29	7 0.28	13 0.51
63 2.48	M 12	40 1.57	60 2.36	80 3.15	-	25 0.98	26 1.02	9.4 0.370	40 1.57	21 0.83	8.3 0.33	3.6 0.14	10.5 0.41
63 2.48	M 12	40 1.57	60 2.36	80 3.15	-	32 1.26	26 1.02	9.4 0.370	40 1.57	21 0.83	8.3 0.33	4.2 0.17	11 0.43
63 2.48	M 12	40 1.57	60 2.36	80 3.15	-	40 1.57	26 1.02	9.4 0.370	40 1.57	21 0.83	8.3 0.33	6.2 0.24	13 0.51
63 2.48	M 12	40 1.57	60 2.36	80 3.15	-	50 1.97	26 1.02	9.4 0.370	40 1.57	21 0.83	8.3 0.33	8.7 0.34	15.5 0.61

Specification

Knob
Plastic, Polyamide (PA)
Black, matte finish

Threaded stud
Stainless steel AISI 304Cu

GN 6336.12
Thrust pad GN 631
Plastic, Polyacetal (POM)
- Operating temperature up to 176 °F (80 °C)
- Black, matte finish

RoHS

Technical Information

Plastic Characteristics	QVX
Stainless Steel Characteristics	QVX

Accessory	Page
GN 631.2 Thrust Pads (NBR)	QVX
GN 631.5 Thrust Pads (Stainless Steel)	QVX

Star knobs GN 6336.11 and GN 6336.12 with stainless steel threaded stud have a ball end whose diameter is smaller than the core diameter of the thread.
These components are an excellent choice for corrosion-free applications.
The swivel thrust pad is easily clipped on and taken off. Thrust pads are supplied unmounted.

see also...	Page
GN 421.12 Hollow Knurled Screws (with Swivel Thrust Pad)	QVX
GN 6336.11 | GN 6336.12 Star Knobs (with Loss Protections GN 111.7)	QVX

How to order (With ball end)

1 2 3
GN 6336.11-40-M8-50

1	Handle diameter d_1
2	Thread d_2
3	Length l_1

How to order (With swivel thrust pad)

1 2 3 4
GN 6336.12-50-M10-45-25

1	Handle diameter d_1
2	Thread d_2
3	Length l_1
4	Thrust pad diameter d_3

⚠ **WARNING**: Cancer and Reproductive Harm — www.P65Warnings.ca.gov