
Mounting Brackets and Supports

Plastic, for Roller Track Assemblies







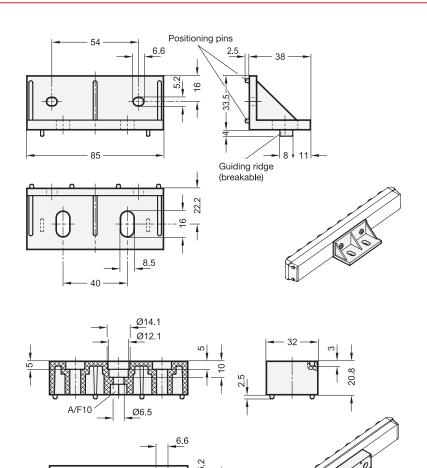

Metric table



Dimensions in: millimeters - inches

54 2.13

Specification

- Plastic Polyamide (PA)
- Black
- Temperature resistant up 194 °F (90 °C)

86

- Plastic Characteristics → page QVX
- · RoHS compliant

Information

Recesses for positioning pins

EN 646.7 mounting brackets and supports (type W) can be used to mount roller track assemblies at a right angle to the support surface, e.g. for the sideways transport of the conveyed material through roller track assemblies. The positioning pins engage with the appopriate grooves of the EN 646.3 carrier rail profiles, so that the angle is positioned in the correct location bracket and locked in place.

Rod Ø12 / Ø14 mm

The mounting brackets and supports (type B) expand the mounting options for roller track assemblies. The dimensions match the angles. The positioning pins engage with the appropriate grooves of the EN 646.3 carrier rail profiles or with the appropriate recesses of the angle. Also, a rod with \varnothing 12 mm can be attached to the mounting block.

How to order EN 646.7-54-W	1	Length
	2	Туре