

- 2 Type**
- SL** Not lockable
 - SCL** Lockable (Keyed alike)
 - SUL** Lockable (Keyed differently)

Metric table



Dimensions in: millimeters - inches

l_1	b_1	b_2	b_3	d	h_1	h_2	l_2	l_3	l_4	l_5	l_6	m_1	m_2
72	10.3	21	15	6.5	33	24	104	45	40	14.5	12.5	56	23
2.83	0.41	0.83	0.59	0.26	1.30	0.94	4.09	1.77	1.57	0.57	0.49	2.20	0.91

Specification



- Housing
Zinc die-cast
Powder coated
Black, RAL 9005, textured finish **● SW**
Silver, RAL 9006, textured finish **● SR**
- Covers and latch
Plastic
- Black-gray for SW
- Light gray for SR
- Lock mechanism
Zinc die-cast
- Key
Steel, nickel plated
- Assembly hardware
Steel, zinc plated, blue passivated finish
- RoHS compliant

Information

GN 936 slam latches enable doors and closures to be effortlessly closed. The slam latch engages automatically when the door is closed preventing the door from opening unintentionally.

The elongated holes allow the slam latch to be mounted on aluminum profile systems with different cross sections.

The variants with type SCL allow every lock to be opened with the same key. For the type SUL there are more than 200 different lock variants.


Two keys are supplied with each slam lock (type SCL, SUL). The key may be inserted or withdrawn in both the locked and unlocked positions.

see also...

- *Product Family Standard Parts for Profile Systems* → page 18
- *Ledge Handles with Cam Latch / Cam Lock EN 932* → www.jwwinco.com
- *T-Nut Assemblies GN 965 (for 30 / 40 mm T-Slot Profile Systems)* → page 2048
- *T-Nut Assemblies GN 968 (for 30 / 40 / 45 mm T-Slot Profile Systems)* → page 2058

How to order	1 Length l_1
GN 936-72-SCL-SW	2 Type
	3 Color



Assembly instruction

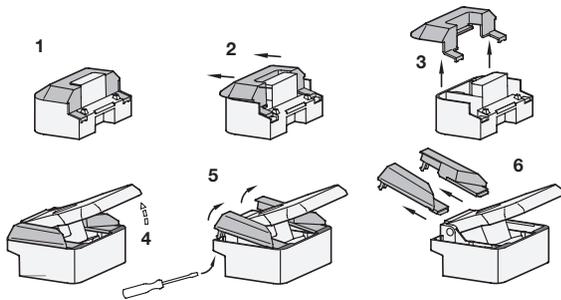

Prior to installation, remove the slam latch cover as shown in the sketch. Socket cap screws DIN 912, hex head screws DIN 933 and hex nuts ISO 4032 each with thread size M 6 can be used for mounting the slam latch.

After installation the covers are reassembled in reverse order. The covers cannot be removed when the slam latch is closed and consequently protect against vandalism.

The elongated holes allow the slam latch to be mounted to the door frame or profile systems both from the operating side and from the rear. The installation clearance of 1 mm is also easy to adjust.

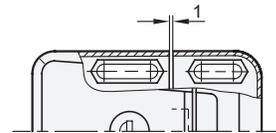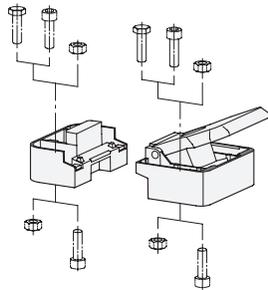

Application example

